


Model: LP-NM-NM-11GHZ



Description

Designed for telecommunications applications up to 11 GHz, manufactured with low-loss LinkedPro® cable and lifetime warranty.

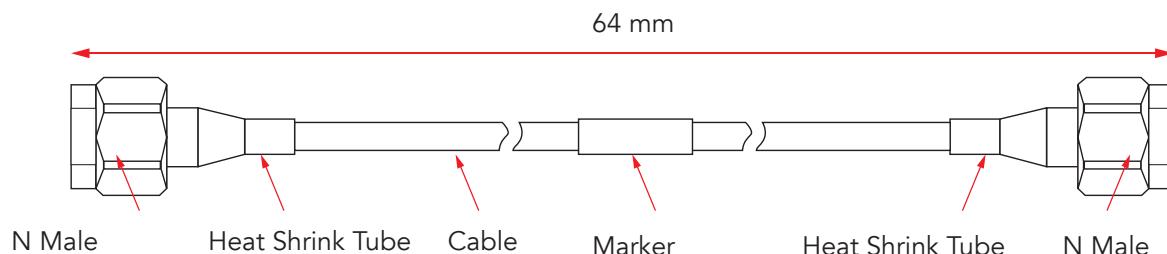

Electrical

Impedance	50 Ω
Insulation Resistance	5000 MΩ min
Frequency Range	DC~18 GHz
Dielectric Withstanding Voltage	1000V max
VSWR	≤ 1.25: 1 @ DC - 11 GHz
Insertion Loss	≤ 1.3 dB @ 11 GHz

Environmental

Temperature Range	-45 to 80°
Durability	500 cycles

Material and Finish

Body	Brass, ternary alloy plating
Nut	Brass, ternary alloy plating
Center Contact	Brass, gold plating
Dielectric	PTFE, N/A

