

Stranded General Purpose Un-shielded Cable 18AWG 4/C - CM

RoHS Compliant


Cables are manufactured to meet current NEC guidelines and are verified by outside standards organizations including (UL)us.

Standard Compliance:

UL 444

Applications

Designed for use in security and alarm systems connecting keypads, sounders/strobes, intercoms, control panels, audio and more.

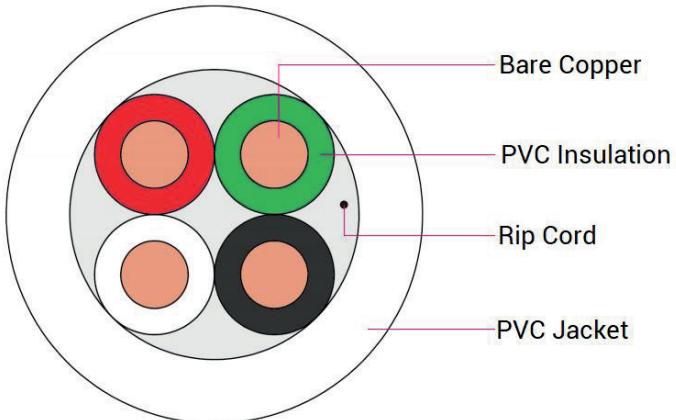

Specifications

| MODELO | LP418W/1000 |
|-------------------------------------|------------------------------------|
| Construcción: | |
| Conductor | 18AWG Solid Bare Copper |
| No. of Conductors | 4 |
| Insulation Type | PVC |
| Color | Black , Red , Green , White |
| Nominal Thickness | 0.30 mm |
| Diameter | 1.60 mm |
| Rip Cord | Yes |
| Jacket Type | PVC |
| Color | White (Other colors are available) |
| Nominal Thickness | 0.40 mm |
| Nominal Diameter | 5.00 mm |
| Electrical & Properties: | |
| Temperature Rating | -20 to 75°C |
| Operating Voltage | 300 Volts max. |
| Capacitance | 530 PF |
| DC Resistance | 21.40 Ohms/KM @20°C |
| Flame Rating | UL 1685 (Vertical Tray), CM |
| Packing: | |
| Standard Packaging | 1000ft Easy Pull Box |